

CATALOG

maier[®]

PROFESSIONAL AUDIO ACCESSORIES & STANDS



CONTENTS

STANDS

1-3

MICROPHONE STANDS

4-5

SPEAKER STANDS

6-7

- SPEAKER POLES
- MUSIC STAND
- TABLET HOLDER

8-9

SPEAKER CABLES

10-11

MICROPHONE CABLES

12 ...

- AUDIO CABLES
- INSTRUMENT CABLES

CABLES



MiST-350D DESKTOP MICROPHONE STAND

Product type: **Desktop microphone stand with round base**

Adjustable height of multi-bracket: **260-380mm**

Material: **steel**

Diameter of main tube: **20mm**



MiST-1460 MICROPHONE STAND

Microphone stand with round base. The stand is adjustable with a two-section cantilever and can rotate 180° up and down.

Product type: **Microphone stand with round base**

Length adjustable: **780-1395 mm**

Cantilever adjustable angle: **0-180°**

Chassis diameter: **250mm**



MiST-1620S MICROPHONE STAND ONE-HAND CLUTCH

Product type: **Microphone stand with tripod base and one-hand clutch**

Length adjustable: **1020-1620 mm**

Material: **steel**

Diameter of main tube: **25mm**





MiST-SB450 SHORT MICROPHONE STAND

Product type: **Short microphone stand with tripod base and adjustment telescoping boom arm.**

height: **450mm**

Telescoping boom length adjustment: **480-880 mm**

Material: **Steel**

Diameter of main tube: **20mm**



MiST-DB800 MICROPHONE STAND

Product type: **Microphone stand with tripod base and adjustment telescoping boom arm.**

Length adjustable: **550-800mm**

Telescoping boom length adjustment: **480-880 mm**

Material: **Steel**

Diameter of main tube: **20mm**



MiST-DB1600C MICROPHONE STAND

Product type: **Microphone stand with tripod base and one-hand clutch**

Length adjustable: **1000-1600mm**

Telescoping boom length adjustment: **480-880 mm**

Material: **Steel**

Diameter of main tube: **25mm**



MiST-DB1600F MICROPHONE STAND

Product type: **Microphone stand with tripod base One click lock to adjusts height**

Length adjustable: **1000-1600mm**

Telescoping boom length adjustment: **480-880 mm**

Material: **Steel**

Diameter of main tube: **25mm**



MiST-DB1600R MICROPHONE STAND

Product type: **Microphone stand with tripod base Clutch rotating to adjusts height**

Length adjustable: **1000-1600mm**

Telescoping boom length adjustment: **480-880 mm**

Material: **Steel**

Diameter of main tube: **20mm**





MSTS-TP1690 SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: **Speaker stand**

- The height-adjustable tripod speaker stands have a locking clutch knob and safety pin.
- Upper pole mounting lock ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1250-1830mm**

Material: **Steel** / Main rod diameter: **38mm**

Tube end: **35mm** / Max. load: **45kgs.**



MSTS-TP1700 SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: **Speaker stand**

- The height-adjustable tripod speaker stands have a locking clutch knob and safety pin.
- Upper pole mounting lock ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1220-1830mm**

Material: **Steel** / Main rod diameter: **41mm**

Tube end: **35mm** / Max. load: **50kgs.**



MSTS-TP1750A SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: **Speaker stand. The die cast aluminium leg. Lightweight construction.**

- The height-adjustable tripod speaker stands have a locking clutch knob and safety pin.
- Upper pole mounting lock ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1250-1880mm**

Material: **Steel / Aluminium leg**

Main rod diameter: **38mm**

Tube end: **35mm** / Max. load: **45kgs.**

MSTS-TP1800R SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: **Speaker stand.**

- The height-adjustable tripod speaker stands have a locking clutch knob and safety pin.
- Upper pole mounting lock ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1020-1800mm**

Material: **Steel** / Main rod diameter: **38mm**

Tube end: **35mm** / Max. load: **100kgs.**



MSTS-TP1900R CRANK-UP SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: **Crank-Up speaker stand.**

- Hand-crank speaker stand for height adjustments.
- Crank up speaker stand pole with metric graduation.
- The height-adjustable tripod speaker stands have a locking clutch knob.
- Tripod base folds down for ease of storage.
- Upper pole mounting point ensures the speaker fits.

Length adjustable: **1480-2420mm**

Material: **Steel** / Main rod diameter: **45mm**

Tube end: **35mm** / Max. load: **80kgs.**



MiST-2100 SPEAKER STAND

Speaker pole 35mm height adjustment locking
It features a safety pin to securely lock the extension pole in place.

Product type: **speaker stand**

Length adjustable: **1810-1200 mm**

Material: **aluminium tube**

Diameter of main tube: **35mm**

Max. load: **60kgs.**

Weight: **3.8kgs.**





MSTS-PM1 SUBWOOFER POLE WITH M20

Subwoofer Pole with M20 thread Pole 35mm. (standard speaker)
Locking safety pin to ensure reliable speaker support
M20-threaded connection to the subwoofer.

Product type: **Subwoofer Pole with M20**


Upper pole mounting lock ensures the speaker fits.
(for satellite speakers.)

Length adjustable: **950-1300mm**

Material: **Steel**

Tube end: **35mm**

Max. load: **35kgs.**

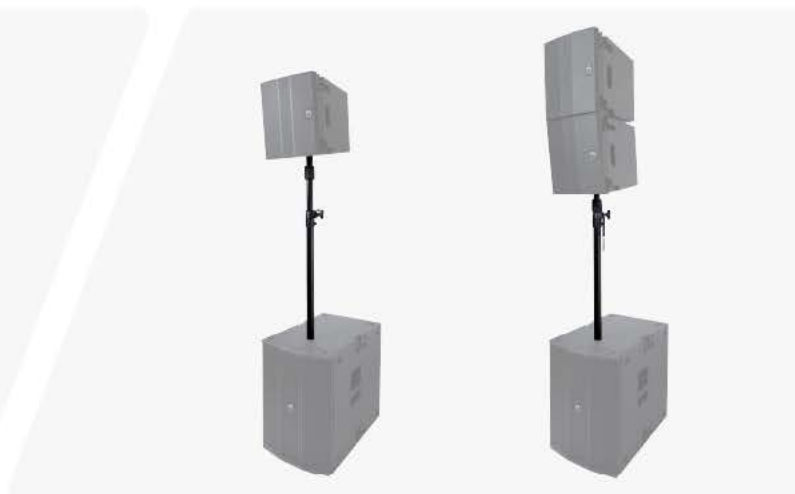

MSTS-PMLi SUBWOOFER POLE WITH M20

Crank up subwoofer pole with M20 thread Pole 35mm. (standard speaker)
Crank up subwoofer pole height adjustment. Support
M20-threaded connection to the subwoofer.

Product type: **Crank up subwoofer pole with M20**

Length adjustable: **800-1100mm**

Material: **Steel**

Tube end: **35mm**

Max. load: **60kgs.**





STK-120S KARAOKE SPEAKER STAND

Stand for the speaker. Integrated cable management makes it simple to hide cables and keep your decor looking clean and elegant.

Product type: **speaker stand**

Length adjustable: **650-1200mm**

The upper plate is width : **22.8cm** / depth : **17.7cm**

The lower plate is width : **25.3cm** / depth : **23.2cm**




MSN-DF152 MUSIC STANDS

Music stand with One-hand quick-release clutch

Product type: **Music stand with one-hand clutch height adjustment**

- Bookplate displays multiple sheets at once and supports the weight of music books.
- Bookplate angle adjusts for clear, easy viewing.
- Height adjusts to a comfortable level for use standing.

Length adjustable: **880-1250mm** / Plate size: **345x475mm**

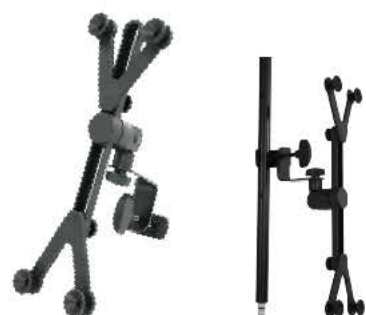


PTH-101 TABLET HOLDER

The clamp-on tablet holder mounts to a microphone stand. A wide tilt and rotation range are easy to position for comfortable viewing and use.

Product type: **Clamp-on tablet holder** mounts to a microphone stand. Used to **fixes iPads and other tablets** with screens that are **7-17** or **7-14** inches. Multi-angle adjustment **360°/180°**

MSC SERIES HIGH QUALITY PROFESSIONAL SPEAKER CABLE

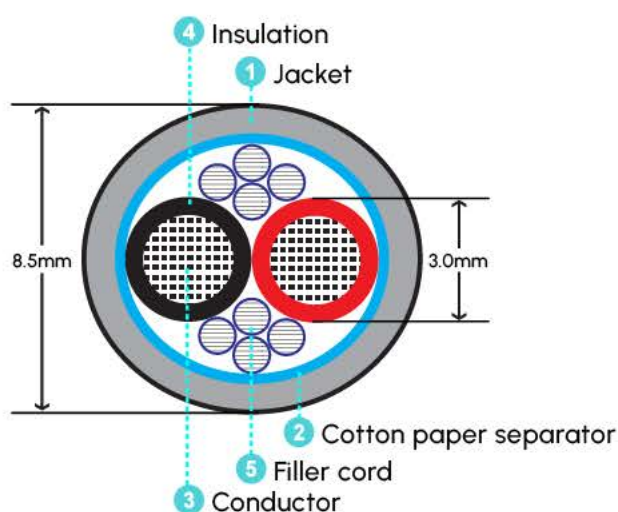

Maier speaker cable speakon
MSC Series range of loudspeaker connectors.

SPECIFICATION

| | | |
|------------------------------|-------------|------------------------------|
| Conductor | Size | 1.5 mm ² / 16 AWG |
| | Composition | 2 x (189 x 0.09 mm) |
| Insulation | Material | PVC |
| | Diameter | Ø3.0 mm ±0.1 mm |
| | Color | Red and Black |
| Filler | Material | Cotton Cords. |
| Jacket | Material | PVC |
| | Color | Blue |
| | Diameter | Ø8.5 mm, tolerance: ±0, 2mm |
| Number of positions (w/o PE) | | 4 |
| Gender | | female |
| Rated current | | 20A RMS |
| Rated voltage | | AC 250V |
| Part category | | female cable connector |
| Temperature range | | -30°C to +80°C |

| | |
|------------------|-----------|
| MSC-SP02M | 2 meters |
| MSC-SP03M | 3 meters |
| MSC-SP05M | 5 meters |
| MSC-SP10M | 10 meters |


Maier High Quality
Professional Speaker
Cable 2*1.5mm²



MSC SERIES SPEAKER CABLES

MSC-101 2x2.5MM² O.D.: 8.0MM

MSC-102 2x4.0MM² O.D.: 9.0MM



CROSS-SECTION

- Speaker cable includes 2 cores, 4 cores, 6 cores, 8 cores, etc.
- Conductor made of 99.99% OFC.
- Insulation made of highly flexible PVC.
- Jacket made of highly elastic PVC.

SPECIFICATION

| CABLE MODEL | MSC-101 | MSC-102 |
|----------------------------|---------------------|---------------------|
| Inner conductor | Φ0.20BC*80 | Φ0.12BC*350 |
| Inner conductor section | 2.5 mm ² | 4.0 mm ² |
| conductor Isolation | PVC Φ3.2 | PVC Φ4.0 |
| Isolation colour | Blue/yellow | Blue/yellow |
| Number of conductors | 2 | 2 |
| Outer jacket | Flexible PVC | Flexible PVC |
| Outer jacket colour | Black & Dark Blue | Black & Dark Blue |
| Outer dimensions | Φ8.0 mm | Φ9.0 mm |
| Temperature range | min. -20°C | min. -20°C |
| | max. 70°C | max. 70°C |
| Packaging | 100 m roll | 100 m roll |
| Lead resistance - 1k meter | ≤8 Ω | ≤5 Ω |

MMC SERIES


MICROPHONE CABLES

MMC-101

MICROPHONE CABLES



CROSS-SECTION



- Fine stranded wire for high-quality signal transmission.
- Very robust, with thick soft PVC jacket.
- Wonderful shielding 90% provided by dense copper spiral shielding and semiconductor shielding.
- High flexible, well-suited for use with cable.

SPECIFICATION

| | |
|-------------------------|-------------------------|
| Inner conductor | Φ0.12 BC*20 |
| Inner conductor section | 0.23 mm ² |
| conductor Isolation | HDPE Φ1.4 |
| Isolation colour | Red/White |
| conductor twisting | Yes |
| Shielding | Φ0.12Cu*64 spiral |
| Outer jacket | Flexible PVC |
| Outer dimensions | Φ6.0 mm |
| Temperature range | min. -20°C max. 70°C |
| Packaging | 100m roll |
| Lead resistance - 100m | ≤9.1 Ω |
| Cable crosstalk - 100m | Min 73.3dB |

MMC-102

MICROPHONE CABLES



CROSS-SECTION

- Fine stranded wire for high-quality signal transmission.
- Very robust, with thick soft PVC jacket.
- Wonderful shielding 85% provided by dense copper braided shielding and semiconductor shielding.
- High flexible, well-suited for use with cable.

SPECIFICATION

| | |
|-------------------------|-------------------------|
| Inner conductor | Φ0.12 BC*20 |
| Inner conductor section | 0.23 mm ² |
| conductor Isolation | LDPE Φ1.3 |
| Isolation colour | Red/White |
| conductor twisting | Yes |
| Shielding 1 | Conductive PVC |
| Shielding 2 | Φ0.12Cu*64 spiral |
| Outer jacket | Flexible PVC |
| Outer dimensions | Φ6.0 mm |
| Temperature range | min. -20°C max. 70°C |
| Packaging | 100 m roll |
| Lead resistance - 100m | ≤9.1 Ω |
| Cable crosstalk - 100m | Min 73.3dB |

MICROPHONE CABLES

MICROPHONE CABLES

| | |
|------------------|-----------|
| PMXF-05MB | 5 meters |
| PMXF-10MB | 10 meters |
| PMXF-15MB | 15 meters |
| PMXF-20MB | 20 meters |



- XLR female to 6.35mm Jack male mono
- Cable MMC-102 OFC conductor $\Phi 6\text{mm}$
- Shell plating Black plated
- 4 lengths(meter): 5m, 10m, 15m, 20m

MICROPHONE CABLES

| | |
|-----------------|-----------|
| XMFM-05M | 5 meters |
| XMFM-10M | 10 meters |
| XMFM-15M | 15 meters |
| XMFM-20M | 20 meters |



- XLR male to XLR female
- Cable MMC-102 OFC conductor $\Phi 6\text{mm}$
- Shell plating Black plated
- 4 lengths(meter): 5m, 10m, 15m, 20m

AUDIO CABLES

AUDIO CABLES

| | |
|-------------------|----------|
| MPSR2-A01M | 1 meter |
| MPSR2-A02M | 2 meters |



- 3.5mm Jack male stereo to 2 x 6.35mm Jack male mono
- Cable conductor $\Phi 4 \times 8\text{mm}$ black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

| | |
|--------------------|----------|
| MPSPM2-A01M | 1 meter |
| MPSPM2-A02M | 2 meters |



- 3.5mm Jack male stereo to 2 x 6.35mm Angled Jack male mono
- Cable conductor $\Phi 4 \times 8\text{mm}$ black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

AUDIO CABLES

RCLR2-A01M
RCLR2-A02M

1 meter
2 meters



- 2 x RCA male to 2 x RCA male
- Cable conductor $\Phi 4 \times 8\text{mm}$ black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

RCMPS-A01M
RCMPS-A02M

1 meter
2 meters



- 3.5mm Jack male stereo to 2 x RCA male
- Cable conductor $\Phi 4 \times 8\text{mm}$ black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

INSTRUMENT CABLES

INSTRUMENT CABLES

PMPM-A03M
PMPM-A05M
PMPM-A10M

3 meters
5 meters
10 meters



- 6.35mm Jack male mono to 6.35mm Jack male mono
- Cable conductor $\Phi 6.0\text{mm}$ black
- Shell plating Black plated
- 3 lengths(meter): 3m, 5m, 10m

INSTRUMENT CABLES

PMPML-A03M
PMPML-A05M
PMPML-A10M

3 meters
5 meters
10 meters



- 6.35mm Jack male mono to 6.35mm Angled Jack male mono
- Cable conductor $\Phi 6.0\text{mm}$ black
- Shell plating Black plated
- 3 lengths(meter): 3m, 5m, 10m

AUDIO CABLES

AUDIO CABLES

PMRC2-A01M
PMRC2-A02M

1 meter
2 meters



- 2 x 6.35mm Jack male mono to 2 x RCA male
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

PSPM2-A01M
PSPM2-A02M

1 meter
2 meters



- 6.35mm Jack male stereo to 2 x 6.35mm Jack male mono
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

AUDIO CABLES

PSPS-A01M
PSPS-A02M

1 meter
2 meters



- 6.35mm Jack male stereo to 6.35mm Jack male stereo
- Cable conductor $\Phi 6$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

PSRC2-A01M
PSRC2-A02M

1 meter
2 meters



- 6.35mm Jack male stereo to 2 x RCA male
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

FLAT AUDIO CABLE

Professional flat audio cable oxygen-free copper conductor perfectly designed gives this cable maximum flexibility to ensure maximum signal transfer from your source device to your audio equipment.

FEATURES :

- High standard 20AWG Oxygen free copper conductor features high conductance and low attenuation.
- The flat architecture of cable prevents the signal distortion by the interference of conductor spacing.
- The soft PVC outer jacket has a high degree of usability for cable connection.
- 2 lengths(meter): 1m, 2m

| | |
|--------------|--------------------------|
| Structure | Flat cable |
| Conductor | 20AWG Oxygen-free copper |
| Insulator | HDPE |
| Outer jacket | Flex Pvc |
| Housing | PVC |

MPSPS FLAT AUDIO CABLE
3.5mm-1/4 TRS plug



MPSPS-GF01M 1 meter
MPSPS-GF02M 2 meters

MPSPS FLAT AUDIO CABLE
3.5mm-3.5mm



MPSPS-GF201M 1 meter
MPSPS-GF202M 2 meters

MPSPS FLAT AUDIO CABLE
3.5mm- 3.5mm RA



MPSPS-GF301M 1 meter
MPSPS-GF302M 2 meters

PMPM FLAT AUDIO CABLE

1/4 TS plug-1/4 TS plug



PMPM-GF01M 1 meter
PMPM-GF02M 2 meters

PMRM FLAT AUDIO CABLE

RCA male-1/4 TS plug



PMRM-GF01M 1 meter
PMRM-GF02M 2 meters

PSPS FLAT AUDIO CABLE

1/4 TRS plug-1/4 TRS plug



PSPS-GF01M 1 meter
PSPS-GF02M 2 meters

RMRM FLAT AUDIO CABLE

RCA.male-RCA.male



RMRM-GF01M 1 meter
RMRM-GF02M 2 meters

XMPM FLAT AUDIO CABLE

XLR 3P.male-1/4 TS plug



XMPM-GF01M 1 meter
XMPM-GF02M 2 meters

XFPS FLAT AUDIO CABLE

XLR 3P.female-1/4 TRS plug



XFPS-6301G 1 meter
XFPS-6302G 2 meters

XFXM FLAT AUDIO CABLE

XLR 3P.female-XLR 3p.male



XFXM-GF01M 1 meter
XFXM-GF02M 2 meters

XFPM FLAT AUDIO CABLE

XLR 3P.female-1/4 TS plug



XFPM-GF01M 1 meter
XFPM-GF02M 2 meters

XMPS FLAT AUDIO CABLE

XLR 3P.male-1/4 TRS plug



XMPS-GF01M 1 meter
XMPS-GF02M 2 meters

maier®

PROFESSIONAL AUDIO
ACCESSORIES STANDS

CATALOG

Imported and distributed by

SOUND VISION CO., LTD.

99/189 MOO.4, SALA KLANG, BANG KRUI,
NONTABURI 11130 THAILAND

SUPPORT : 02-433-9988 LINE OFFICIAL : @SOUNDVISION
EMAIL : INFO@SOUNDVISION.CO.TH WWW.SOUNDVISIONPRO.COM

