




Android 13.0



4-Core A73 &
4-Core A53

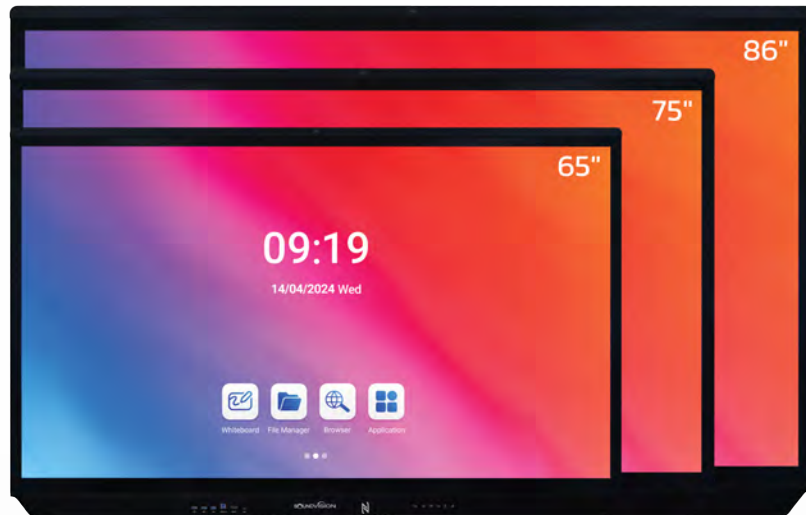

Full-Featured
USB-C



Optical
Bonding



PC Module



20 Points Touch




Integrated
Speakers




WIFI-6


SUPPORT PLATFORMS




google play



google
meet




microsoft
teams



zoom



youtube



mozaik
education

OPTIONAL ACCESSORIES



Mobile Stand SMI-201 for
65"-86" & SMI-202 for 86"-110"



OPS Mini PC (Pluggable)
SPC-i5-12th & SPC-i7-12th




Screen Mirroring Dongle
SSD-01A



Smart Pen
SSP-01


WHITEBOARD FEATURES



Pen & Shape Tools




Dynamic table

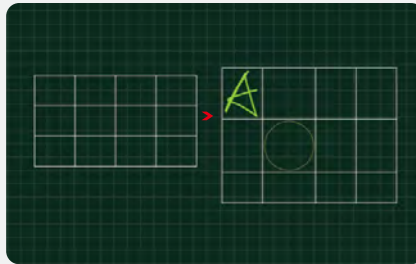

Scan QR code to receive whiteboard contents



Scan QR code to transfer files to the whiteboard

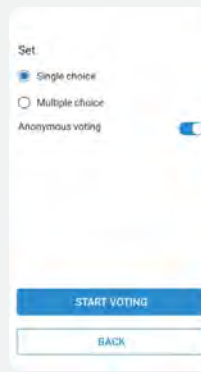

Scan QR code to vote

SCREEN SHARE




Platform	Android	IOS	Mac OS	Windows
 Software	✓	✓	✓	✓
 Wireless	✗	✗	✓	✓
 AirPlay	✗	✓	✓	✗
 Type-C (Optional)	✓	✓	✓	✓
 USB-A	✗	✗	✓	✓

Wireless presentation: up to 9 concurrent devices


CT Pro Series

4K Capacitive smart Touch Screen


WHITEBOARD FEATURES

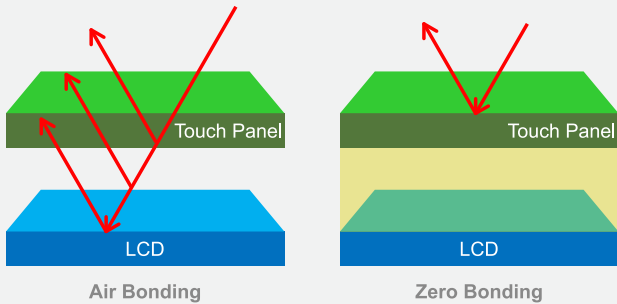

Optical Bonding

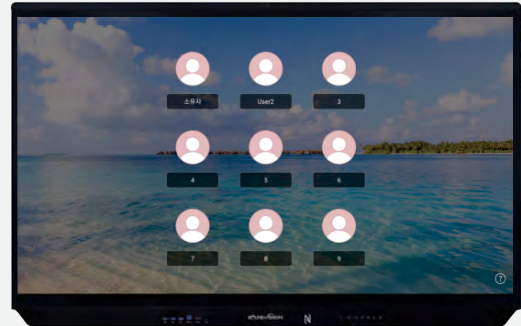


Multi User Management

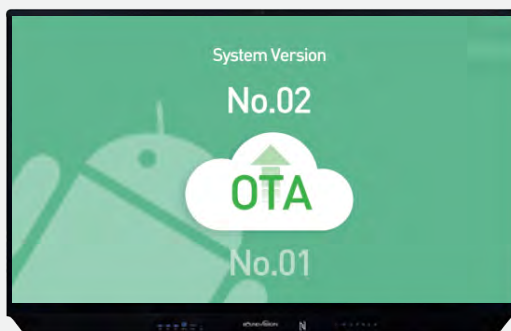


OTA: Over the Air remote update



Cloud Drive

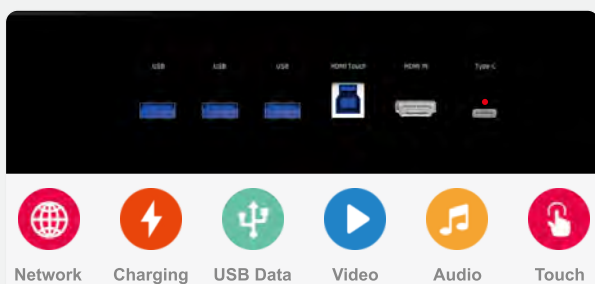

Full-featured front USB Type-C Port

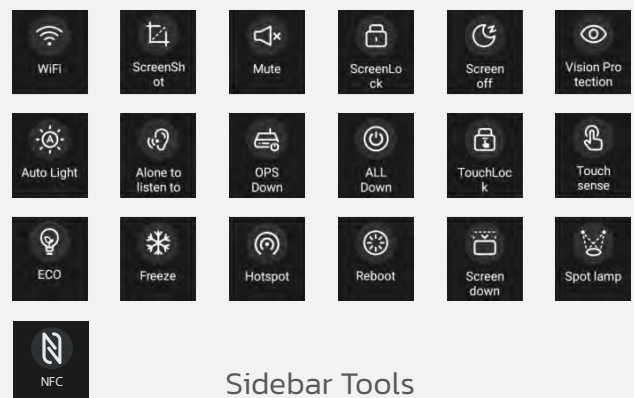

Sidebar Tools



This card can be used to control the functions of the smart touch screen, whether Locking the screen, unlocking the screen, turning off the touch screen, unlocking the touch screen, etc.

CT Pro Series

4K Capacitive smart Touch Screen

SPECIFICATIONS

DISPLAY

Screen Size	65"	75"	86"
Bonding Technology	Optical Bonding		
Aspect Ratio	16:9		
Max Visual Area (H/V) (mm)	1428.48×803.52	1649.664×927.936	1895.04×1065.96
Resolution (H/V)	4K UHD 3840×2160		
Display Color / Color Gamut	1.07B (10Bit) / 72%NTSC		
Brightness(cd/m2)	350		
Contrast Ratio(Typ)	1300:1/4000:1/5000:1		
Viewing Angles (H/V)	178°		
Refresh Rate	60Hz		
Response Time	8ms		
Back Light	DLED		
Life	≥30000 hours		
Operation Time	16/7		

TOUCH

Touch Technology	Capacitive
Supported Systems	Windows10/8/7/XP/Android/Linux/Mac OS X/Chrome
Interactivity	Simultaneous Pen and Touch
Glass	Mosh Hardness Scale 7H + Anti-Glare
Response Time	8ms
Min. Object Size	2mm
Touch Accuracy	±1mm

ANDROID OS

System Version	Android 13.0
Solution	Amlogic A311D2
CPU/GPU	4-Core A73 & 4-Core A53 / Arm Mali-G52 MP8(8EE)
RAM/ROM	8 GB DDR4 / 128GB EMMC
Bluetooth	Version 5.2, 2.4GHz, 0~10m Working Distance
Wi-Fi	Version 802.11ac/b/g/n/a/ax, 2.4GHz/5GHz, 0~10m Working Distance, Wi-Fi 6.0

CONNECTIVITY

Front Interfaces	USB 3.0 × 3, HDMI IN × 1, Touch USB × 1, USB Type-C × 1(full-featured), Power Button / Light Sensor/IR Remote Receiver × 1
Rear Interfaces	Rs232 × 1, USB-C (3.0) × 1, RJ45 IN × 1, USB touch (DP) × 1, DP (1.4) × 1, HDMI IN (2.0) × 2, USB touch (HDMI) × 1, MIC IN × 1, USB2.0 (Android only) × 2, USB3.0 (Public) × 2, RJ45 OUT × 1, HDMI OUT × 1, Earphone/Line-out × 1, Digital coax out × 1

GENERAL

Camera & Mic	48M Pixel Camera, 8 Array Microphones		
Speaker	2×16W+ Subwoofer 20W		
Max. Power Consumption	180W	280W	480W
Voltage&Standby Power Consumption	100~240V, 50/60Hz; 4A; ≤0.5W		
Environmental	Working Temperature 0°C~40°C, Working Humidity 10%~90%RH		
Product Dimensions (mm)	1483×943×82	1705×1069×82	1951×1211×83
Packaging Dimensions (mm)	1630×220×1050	1860×220×1160	2120×220×1325
Net Weight (kgs)	35	47.2/47	61.5/61.3
Gross Weight (kgs)	61 / 45	61.4 / 60.7	77.6 / 76.6
VESA Wall Mount (mm)	500×400	600×400	800×400
Wall Screw	M8×20mm		
Accessories	Power Cable ×1, Stylus Pen×2, Wifi Module×1, Wall Mount Bracket×1, Remote Control×1, User Manual x1 HDMI Cable×1, Touch Cable×1, NFC Card x1		