


# DCW-9900D Wireless Digital Delegate Unit

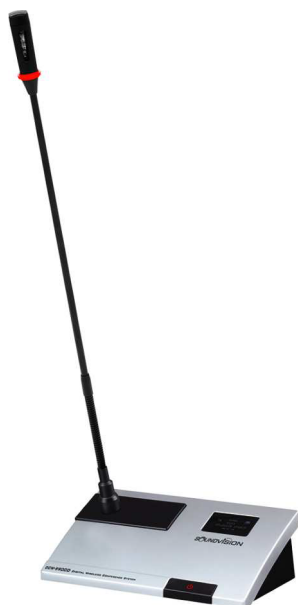

- 2.4G Wireless digital conference system.
- 2.4G high frequency given safe meeting circumstance.
- Used as delegate unit.
- LCD 128x64 dot matrix display microphone ID, battery level, microphone state, speaking mode, duration Speech time.
- Good ability for resistance to Mobile interference.
- Support automatic video-camera tracking function.
- Easy to move without wiring connection.
- Built-in rechargeable lithium battery provides up to 8 hours.

**DCW-9900 Series** is 2.4G Wireless digital conference system, This series includes Wireless digital controller Unit (DCW-9900M), Wireless digital chairman unit (DCW-9900C) and Wireless digital delegate unit (DCW-9900D). This series combined video-tracking system, supports HD camera and SD camera and support up to 255 units.

DCW-9900 Series with simple and elegant design, Discussion Unit has TFT display information. Only Chairman Unit has priority of the whole meeting and can terminate or discontinue other delegate units who is speaking. This series can be perfectly integrated into any conference rooms or meeting rooms without additional wiring. It's the best wireless conference solutions for small to medium scale conferences.

DCW-9900 Series supports multiple meeting for :

- Corporate meeting Rooms.
- Government meeting room & City Council Meeting.
- Education institutions.
- Courtrooms.
- Non-profit organizations.

## Certifications : CE and RoHS

The DCW-9900D conforms to standard

## Feature

- 2.4G Wireless digital conference system.
- 2.4G high frequency given safe meeting circumstance.
- Used as delegate unit.
- Easy to move without wiring connection.
- Good ability for resistance to Mobile interference.
- LCD 128x64 dot matrix display microphone ID, battery level, microphone state, speaking mode, duration Speech time.
- Built in Lithium battery and can rechargeable power of battery.
- Support automatic video-camera tracking function.
- Removeable gooseneck microphone with light ring indicator on microphone stem, light up red when microphone turn on.
- ABS plastic shell, fashion short microphone.
- Adopt flocking technology with the surface of the shell, high grade and scratch resistance.
- Power/Standby key : long press for on/off the unit, press one time for standby function.
- Long pickup distance, high fidelity microphone supply first-rate definition and directivity.

## Controls and Indicators

### On front

- Microphone on/off and microphone power on/power off button.
- LCD display for information with status of working ( ID number, levels of battery, microphone State, microphone mode).
- Light ring indicator on microphone stem, lights up red when microphone is on.

## Interconnections

### On front

- Socket for pluggable microphone (A socket is provided to connect the pluggable microphones.)

### On rear

- Port for recharge power of battery.

# DCW-9900D Wireless Digital Delegate Unit

## Specifications

<b>Carrier frequency band</b>	2.400-2.500GHz
<b>Communication distance</b>	60M (Max)
<b>Frequency response</b>	20Hz~20KHz
<b>T.H.D.</b>	<0.05%dB
<b>S/N Ratio</b>	>90dB
<b>Operating temperature range</b>	-20~70℃
<b>Signal covering range</b>	60M (Max)

### DCW-9900D Delegate Unit

<b>Carrier frequency band</b>	2.400-2.500GHz
<b>Frequency response</b>	40Hz-18kHz
<b>S/N Ratio</b>	68dB (A-Wieght)
<b>Sensitivity</b>	-43 dBV/Pa
<b>Transmitter power</b>	10mW
<b>Microphone Type</b>	Condenser
<b>Polar pattern</b>	Ultra Cardioid
<b>Length of Microphone</b>	480mm
<b>Power supply</b>	Built in Lithium battery
<b>Dimensions unit without mic</b>	190x125x63 mm
<b>N.W.</b>	700g



## Diagram

