



# SVM-12A

PROFESSIONAL ACTIVE STAGE MONITOR **700w**



- 12" Coaxial Active Stage Monitor
- 2 way Bi-amped coaxial stage monitor Speaker
- Frequency Response 50Hz~20kHz
- Coverage angle(Horizontal x Vertical): 80°x80°
- Amplifier Class-D/AB
- Power output 350 Watts (RMS)
- MAXPower output 700 Watts
- Connectors Input: XLR / TRS(LINE/MIC) | Output: XLR link
- Operating voltage AC 220V~240V, ~50/60Hz




## SPECIFICATIONS

MODEL	SVM-12A
Type	2-way Bi-amped coaxial stage monitor Speaker
Driver	12" coaxial speaker
Frequency	50Hz~20kHz
Dispersion Angle (Horizontal x Vertical)	80° x 80°
Max output spl	124dB (1m)
Impedance	Mic Balance 20K   Mic Unbalance 10K LINE Balance 200K   LINE Unbalance 100K
Amplifier	Class D/AB + switching power design
Power output (RMS)	350W
Power output (MAX)	700W
Inputs	XLR / TRS (LINE/MIC) input
Outputs	XLR link output
Preset model	Flat / Low cut selectable
Enclosure	
Cabinet	Plywood painted cabinet
Grill	1.2mm steel
Pole	35mm stand pole
Operating voltage	AC 220V~240V, ~50/60HZ
Power consumption	65W
Dimensions (H x W x D)	340x500x460mm
Packed Dimensions (H x W x D)	585x530x455mm
Net Weight	17kgs
Gross Weight	19kgs

Certifications : CE and RoHS

## EXAMPLE ON THIS LIVE SOUND SYSTEM

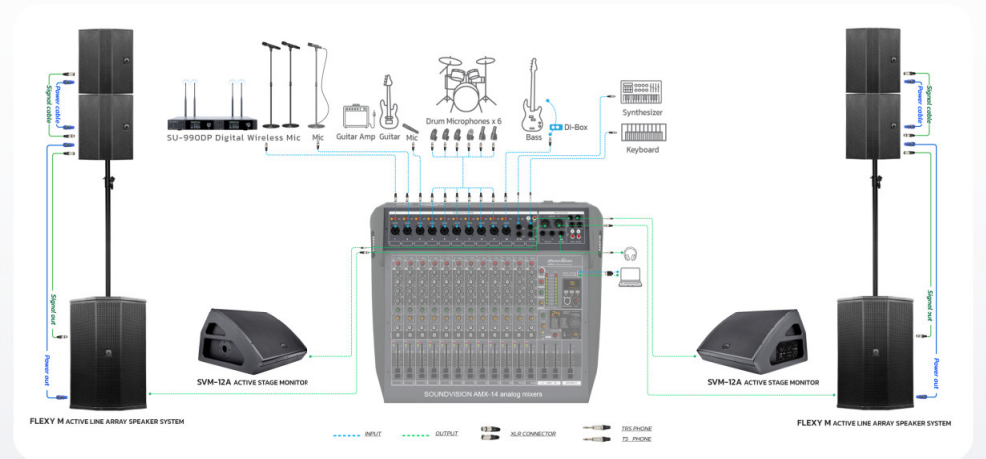

## SOUND VISION CO., LTD.

9 Chaiphayruak Rd., Taling Chan, Taling Chan, Bangkok 10170 Thailand  
 Email : info@soundvision.co.th Support : 02-433-9988  
 LINE Official : @soundvision www.soundvisionpro.com

