

# TLA-SUB Series Active Subwoofer Speaker




**TLA Series (True Line Array) Active Subwoofer Speaker Class D** A Wonderful Integration of Art and Technology Create a New Model for Intelligent line array speaker system. Sound System not only provides high-quality sound, but also needs to more attractively integrate the business environment and more easily to combine speaker system.

## Feature

- 12", 15" high quality and sound pressure transducers.
- Solid and excellent Low frequency response.
- Elegant aesthetic design for the most demanding installations.
- Plug and play smart Jack connector.
- Stereo balanced XLR and Unbalanced RCA Input two Speakon output for Column speaker portable.
- Separated Full range and Bass Volume control.
- Bluetooth connected music playback Applications.
- Supports multiple entertain for Dinner party, Hotel ball room, Bar, Shopping mall, Portable sound reinforcement.
- Together used with TLA-208, TLA-306, TLA-312.

## Specifications

Model	TLA-12S	TLA-15S
Transducer	1 x 12" (300 mm) ferrite woofer	1 x 15" (385 mm) ferrite woofer
Frequency Response	45Hz-180Hz	40Hz-150Hz
Rated Power	350W	500W
Sensitivity	95dB	96dB
Maximum SPL	124dB	129dB
Nominal Impedance	8Ω	8Ω
Power Output	LF: 600W + HF: 2 x 300W (8Ω)	LF: 1000W + HF: 2 x 400W (8Ω)
DSP Connection	2 x MIC/Line + 2 x RCA + 1 x Bluetooth input, 2 x Speakon output	2 x MIC/Line + 2 x RCA + 1 x Bluetooth input, 2 x Speakon output
Dimensions (W x H x D)	358 x 530 x 485 mm	448 x 662 x 555 mm
Net Weight	27.9 kg	40.9 kg

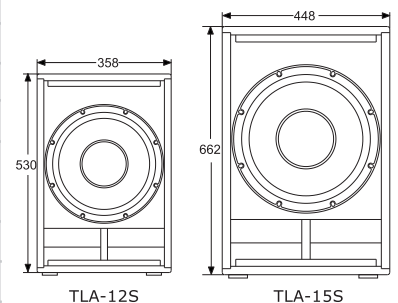

# TLA-SUB Series Active Subwoofer Speaker

## Applied to use with the Subwoofer TLA-208/TLA-306/TLA-312



- TLA-200Series 2" high quality and sound pressure transducers.
- TLA-300Series Italian made 3" high quality and sound pressure transducers.
- Solid and excellent mid range frequency response.
- Plug and play smart Jack connector.
- Phoenix and Speakon Input for both portable and installation Applications.

## Optional Accessories

MP-35-60  
(Long Standing with Cable Connection Inside 600mm)



MP-35-10  
(Short Connector with Cable Connection Inside 100mm)

## Typical Combinations

