


### Professional HDMI Switcher 8 in / 1 out : 4K@60Hz



#### EXAMPLE CONNECTION DIAGRAM

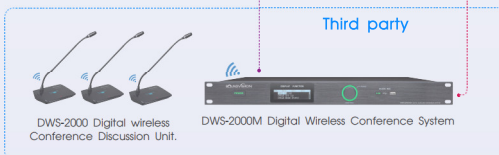

- HDMI
- network LAN
- RS232
- RJ485 / Control line

#### Support third party control :

DCS-990M / DCW-9900M / DCS-1000M / DCS-2000M / DWS-2000M

#### FEATURES

- Auto switch 8 HDMI sources to one 4K display.
- Support resolutions up to 4K@60Hz.
- Supports EDID management.
- HDCP2.2 compliant.
- Support front panel buttons, IR signals, RS232 / IP commands to control HDMI switch.
- Support hot-plug connect or disconnect devices to the HDMI switch in any time and without turn off devices.
- Prevent display settings changed while switching input ports.
- Support auto switching to monitor computers in a specified time interval.
- Includes IR remote.

#### SPECIFICATIONS

Model. VHSW-4681

Auto Scan	Yes
Port selection	Front panel buttons : Yes   Keyboard hotkeys : No IR remote control : Yes   Console commands : RS232 / IP

#### Technical

Max. Resolution	3840 x 2160@60Hz
Auto to get EDID	Yes
Data rate	18 Gbps
Auto scan interval	5~3600 Seconds
Beep Sound	On/Off
OSD	No
Console ports	RS232 : 1*3 Pins jack   LAN (TCP/IP) : 1*RJ45 IR extension input : 1*AUX
Input	8 * HDMI Type A
Output	1 * HDMI Type A
ESD protection	Human body model - ±8kV (Air-gap discharge)

#### General

Power supply	DC 12V
Dimensions (W*L*H)	150 x 440 x 44.5 mm
Weight	1800g