

SVS SERIES

WALL-MOUNT INSTALLATION SPEAKER







SVS-42WW



SVS-62WB SVS-82WB



5V5-62WW 5V5-82WW

SVS SERIES is a new wall-mount two-way passive indoor installation loudspeaker 8 Ohm 70V/100V ideal for applications requiring high-quality sound. designed for a wide range of commercial audio applications including retail shops, hotels, shopping malls, restaurants, conference – rooms, bars and health clubs.

SPECIFICATIONS _____

MODELS	SVS-42WB SVS-42WW	SVS-62WB SVS-62WW	SVS-82WB SVS-82WW
Speaker Type	Full-range, Low-High, Two-Way	Full-range, Low-High, Two-Way	Full-range, Low-High, Two-Way
Transformer Taps	70V : 20W, 10W, 5W, 2.5W	70V : 40W, 20W, 10W, 5W	70V : 40W, 20W, 10W, 5W
	100V : 40W, 20W, 10W, 5W 8Ω Bypass	100V : 80W, 40W, 20W, 10W 8Ω Bypass	100V : 80W, 40W, 20W, 10W 8Ω Bypass
Frequency Response	85Hz ~ 20KHz (- 3dB)	70Hz ~ 20KHz (-3dB)	60Hz ~ 20KHz (-3dB)
	80Hz ~ 20KHz (- 10dB)	65Hz ~ 20KHz (-10dB)	55Hz ~ 20KHz (-10dB)
Sensitivity 1 W/1 m	86dB	88dB	89dB
Max. SPL/1m (calc)	113dB	118dB	12OdB
Coverage (Nominal -6 dB) H	90° (±5°)	100° (±5°)	100° (±5°)
Coverage (Nominal -6 dB) V	70° (±5°)	60° (±5°)	60° (±5°)
System Power Handling	40W/80W(Max)	80W/160W(Max)	90W/180W(Max)
Driver LF Transducer	4 inch Glass Fiber Woven Cone Rubber Edge	6.5 inch Glass Fiber Woven Cone Rubber Edge	8 inch Glass Fiber Woven Cone Rubber Edge
Driver HF Transducer	1 inch Neodymium Soft Dome	1 inch Neodymium Soft Dome	1 inch Neodymium Soft Dome
Nominal Impedance (Passive)	8Ω	8Ω	8Ω
Input Connections	Euroblock / screw terminal	Euroblock / screw terminal	Euroblock / screw terminal
Color	Black / White	Black / White	Black / White
Indoor / Outdoor	Indoor	Indoor	Indoor
	ABS	ABS	ABS
Dimensions (H x W x D mm)	145 x 147 x 295mm (without bracket)	196 x 200 x 330mm (without bracket)	240 x 235 x 390mm (without bracket)
Weight	5.6 Kg/pair, 2.8 Kg / Single	10 Kg/pair,5 Kg / Single	11 Kg/pair, 5.5 Kg / Single

 ${\sf Certifications}: {\sf CE}$


Specifications are subject to change without prior notification.



SVS SERIES

WALL-MOUNT INSTALLATION SPEAKER

EXAMPLE CONNECTION DIAGRAM

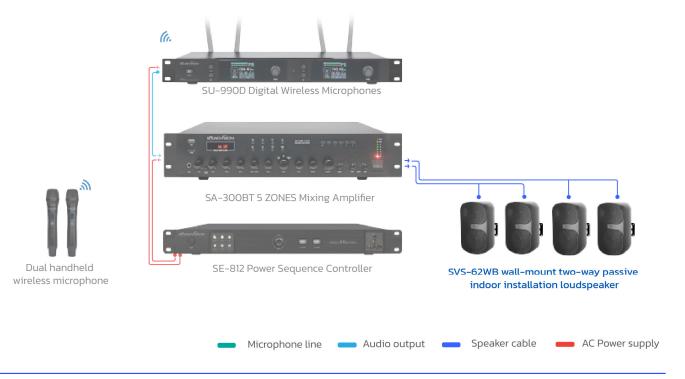

SVS Series supports applications multiple

Meeting Room, Conference Room, Training Rooms, Hotels, Health clubs, Retail shops, Shopping malls & Plaza, Restaurant & Bar.





